


SAURER.

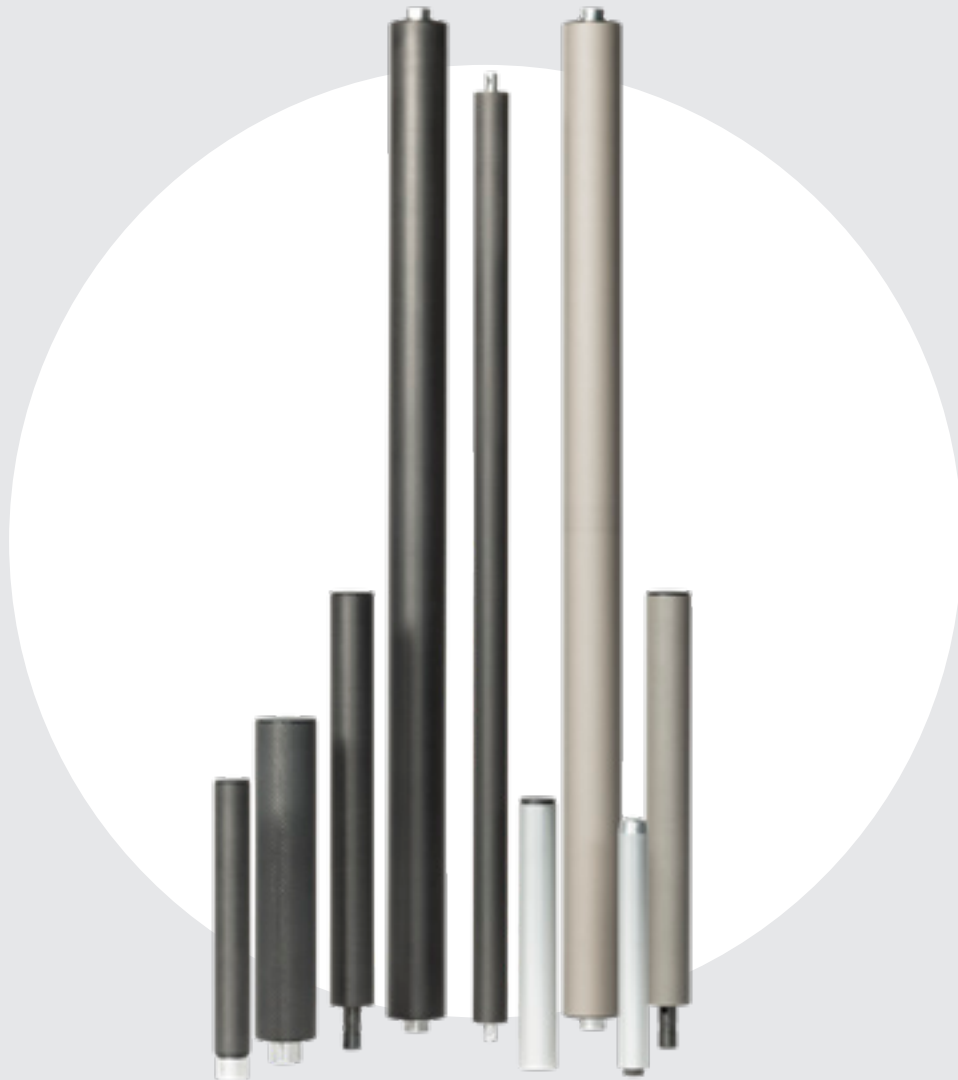


Types, sizes, surfaces.

Temco Deflection Rollers ULR

Deflection rollers ULR

Deflection rollers figure

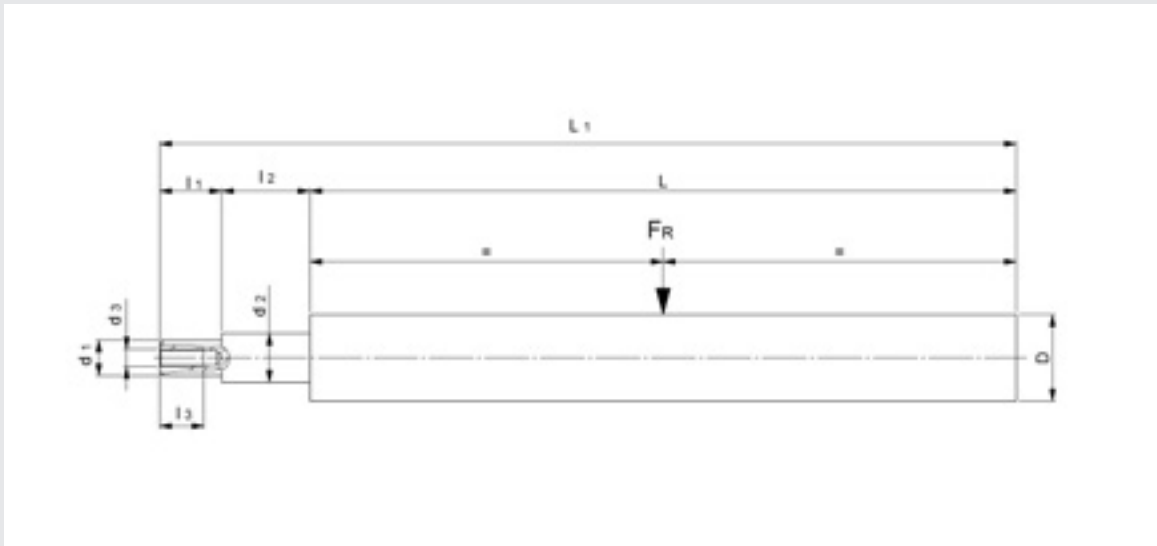

Overview

Type	Shell		Material	Coat	Adaptor							Material	L ₁ [mm]	v _{max} [m/min]
	D [mm]	L [mm]			d ₁ [mm]	l ₁ [mm]	d ₂ [mm]	l ₂ [mm]	d ₃ [mm]	l ₃ [mm]				
ULR34250-06**	34	250	CFRP				Ø29.6	25.0	M8	20.0	Alu	275.0	750	
ULR34250-07**	34	250	CFRP		M12	15.0	SW24	125.0			St.	390.0	750	
ULR34250-08**	34	250	CFRP	XP 0198			Ø29.6	25.0	M8	20.0	Alu	275.0	750	
ULR34250-09**	34	250	CFRP	XP 0198	M12	15.0	SW24	125.0			St.	390.0	750	
ULR34250-10**	34	250	CFRP		Ø18.0	45.0	Ø21.0	-1.5	M8	20.0	Alu	293.5	750	
ULR34250-11**	34	250	CFRP	XP 0198	Ø18.0	45.0	Ø21.0	-1.5	M8	20.0	Alu	293.5	750	
ULR34250-15	34	250	CFRP		Ø18.0	75.0	Ø21.0	-1.5	M8	20.0	Alu	323.5	750	
ULR34400-02**	34	400	CFRP		Ø18.0	45.0	Ø29.6	-1.5	M8	20.0	Alu	443.5	600	
ULR34400-E-03**	34	400	CFRP				Ø30.0	15.0	M8	16.0	Alu	415.0	400	
ULR36200-E-00	36	200	ALU	anodized								200.0	400	
ULR36400-E-00	36	400	ALU	anodized								400.0	400	
ULR39130-E-01	39	130	ALU	hard-anodized	Ø16.0	28.0	Ø22.0	135.0	M8	20.0	St.	293.0	400	
ULR39220-E-01	39	220	ALU	hard-anodized	Ø16.0	28.0	Ø22.0	81.0	M8	20.0	St.	329.0	400	
ULR39320-E-01	39	320	ALU	hard-anodized	Ø16.0	28.0	Ø22.0	31.0	M8	20.0	St.	379.0	400	
ULR44200-02**	44	200	CFRP		Ø20.0	50.0	Ø29.6	10.0	M8	20.0	Alu	260.0	450	
ULR44250-04	44	250	CFRP		M12	15.0	SW24	125.0			St.	390.0	550	
ULR44250-11	44	250	CFRP		Ø18.0	45.0	Ø23.5	23.5	M8	20.0	Alu	318.5	700	
ULR44250-12	44	250	CFRP	XP 0198	Ø18.0	45.0	Ø23.5	23.5	M8	20.0	Alu	318.5	700	
ULR44300-02**	44	300	CFRP		Ø20.0	50.0	Ø29.6	10.0	M8	20.0	Alu	360.0	450	
ULR44400-05	44	400	CFRP		Ø18.0	45.0	Ø29.6	-1.5	M8	20.0	Alu	443.5	650	
ULR44400-06	44	400	CFRP	XP 0198	Ø18.0	45.0	Ø29.6	-1.5	M8	20.0	Alu	443.5	650	
ULR44400-08	44	400	CFRP		Ø18.0	45.0	Ø29.6	-1.5	M8	20.0	Alu	443.5	450	
ULR44400-09	44	400	CFRP	PC915S	Ø18.0	45.0	Ø29.6	-1.5	M8	20.0	Alu	443.5	450	
ULR60320-00**	60	320	CFRP		54.5	22.0			M12	22.0	Alu	342.0	700	
ULR60440-01	60	440	CFRP	XP 0198	Ø29.0	85.0					Alu anodized	540.0	700	
ULR60440-02	60	440	ALU	hard-anodized	Ø25.0	15.0	Ø35	120	M12	24.0	V2A	570.0	450	
ULR60440-03	60	440	ALU	XP 0198	Ø25.0	15.0	Ø35	120	M12	24.0	V2A	570.0	450	
ULR60440-04	60	440	ALU	hard-anodized	Ø29.0	85.0					Alu anodized	540.0	450	

** = Standard

Saurer Technologies GmbH & Co. KG
Engineered Bearing Solutions
Fuldaer Str. 19
97762 Hammelburg
Germany
T +49 9732 87 0
F +49 9732 87 310
sales.bearings@saurer.com

Saurer (JiangSu) Textile Machinery
Company Limited
Shanghai Branch Company
36F, Tower B, The HQ
No. 100 Zunyi Road
Shanghai 200051
P. R. China
T +86 21 22262500
F +86 21 22262512
saurer.com